

# SPECIFICATIONS FOR T38 SERIES Dual Junction Infrared LED Model: EMC 3838-90° (850nm)

Part No: T38IR011A-xxxxx

Fujian Lightning Optoelectronic Co.,Ltd.

Device No.: N/A


www.tdled.com

1



Features:

- Top view Infrared LED
- \* High Power Infrared LED
- \* Low Thermal Resistance
- \* Pb-free Reflow Soldering Application
- \* RoHS and REACH compliant



# **Applications:**

- \*Surveillance Systems
- \* Machine Vision
- \* License Plate Scanning
- \* Automotive Sensing
- \* Night Vision


Fujian Lightning Optoelectronic Co.,Ltd.

www.tdled.com

2



#### Part Numbering System



Item Number Code	Description	Content
		1S:1010; 1A:1919; 20:2016; 3B:3014; 28:2835
X1	Type code	34:3020; 3C:3030; 5C:5050; 7C:7070; 1D:100100;
		19:Ceramic 3535; 15:Ceramic 5050; 11:Ceramic 1616.
		BL: blue ; GR : green; YE : yellow;
X2	CCT code	RE : red; PA: PC Amber ;IR :Infrared;
		UV : ultra violet;CW:RGB; FW: RGBW
Х3	Color Rendering	Color :0.
X4	No. of serial chip	1-Z.
Х5	No. of parallel chip	1-Z.
Х6	Component code	A-Z.
Х7	Color Code	M:ANSI; F:ERP; R:85°C ANSI; T:105°C ANSI; B:Backlighting;
		Q:Others;AT:Tospo
X8	Internal code1	\
Х9	Internal code2	\
X10	Spare code	\

3



# Electrical/Optical Characteristics at Ta=25°C

ltem	Symbol	Min	Тур	Max	Unit	Condition
Forward Voltage	V <sub>F</sub>	2.6	3.1	3.6	V	I <sub>F</sub> =350mA
Reverse Current	I <sub>R</sub>	-	-	10	μΑ	V <sub>R</sub> =5V
Radiant flux	Φ <sub>e</sub>	-	510	-	mw	I <sub>F</sub> =350mA
View Angle	20 <sub>1/2</sub>	-	90	-	o	I <sub>F</sub> =350mA
Thermal resistance	(Rth <sub>j-sp</sub> )	-	4.5	-	°C/W	I <sub>F</sub> =350mA
Electrostatic Discharge	ESD	6000	-	-	V	HBM

- \* Tolerance of measurements of the Forward Voltage is ±0.1V.
- \* Tolerance of measurements of the Radiant Flux is ±7%.
- \*  $2\theta 1/2$  is the off-axis where the Radiant Flux intensity is 1/2 of the peak intensity.
- \* Tolerance of measurements of Peak Wavelenth is ±2.0nm
- \* Rth j-sp is the thermal resistance from LED junction to solder point on MCPCB with electrical power.

## Absolute Maximum Ratings at Ta=25°C

Item	Symbol	Absolute Maximum Rating	Unit
Forward current	۱ <sub>F</sub>	1000	mA
Pulse Forward current	I <sub>FP</sub>	1200	mA
Power Dissipation	PD	3600	mW
Reverse Voltage	V <sub>R</sub>	5V	V
Operating Temperature	Topr	-40~+105	°C
Storage Temperature	Tstg	-40~+105	°C
Junction Temperature	Тј	115	°C
Soldering Temperature	Tsld	Reflow Soldering: 230°C or 260°C for 10sec	

- \* LED's properties might be different from suggested values like above and below tables if operation condition will be exceeded our parameter range. Care is to be taken that power dissipation does not exceed the absolute maximum rating of the product.
- \* All measurements were made under the standardized environment of Lightning LED.



# **Bin Structure**

# Radiant Flux Bins, IF = 350mA, Ta =25°C

Radiant Flux			
Bin Code	Min.	Max.	Unit
JP1	390	440	mw
JP2	440	490	mw
JQ1	490	550	mw
JQ2	550	610	mw
JR1	610	690	mw

\* Tolerance of measurements of the Radiant Flux is ±7%.

# Peak Wavelength Bins, IF =350mA, Ta =25°C

Bin Code	Min.	Max.	Unit
XEO	840	860	nm
XFO	860	880	nm

\*Peak Wavelength±2.0nm.

# Forward Voltage Ranks, IF =350mA, Ta = $25^{\circ}$ C

Bin Code	Min.	Max.	Unit
AB6	2.6	2.8	V
AC3	2.8	3.0	V
AC4	3.0	3.2	V
AC5	3.2	3.4	V
AC6	3.4	3.6	V

\* Tolerance of measurements of the Forward Voltage is ±0.1V.

Fujian Lightning Optoelectronic Co.,Ltd.	www.tdled.com	<u>m</u>
Device No.: N/A	Rev.1	5



#### **Typical Characteristics Curves**

#### Fig 1. Typical Spectrum, Ta = 25°C

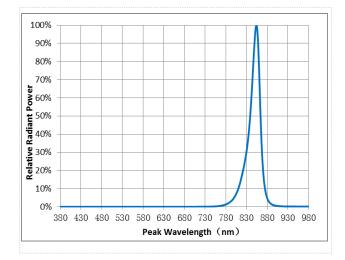


Fig 3. Forward Current vs. Relative Voltage,  $Ta = 25^{\circ}C$ 


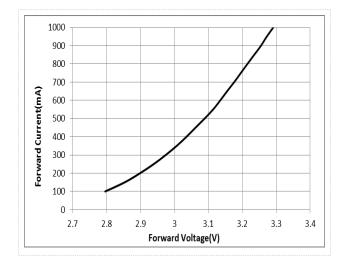


Fig 5. Typical Viewing Angle =90°, Ta =  $25^{\circ}$ C

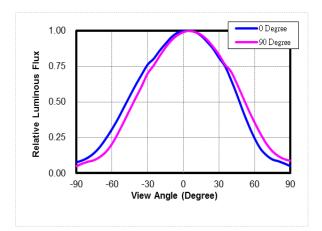

# Fujian Lightning Optoelectronic Co.,Ltd.

Device No.: N/A

Fig 2. Forward Current vs. Relative Intensity,  $Ta = 25^{\circ}C$ 




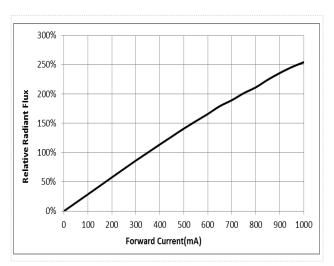


Fig 4. Ambient Temperature vs. Relative Output Flux

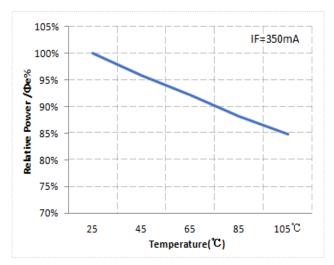




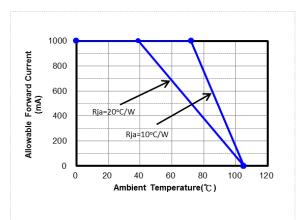

www.tdled.com Rev.1 6




# **Package Dimensions**

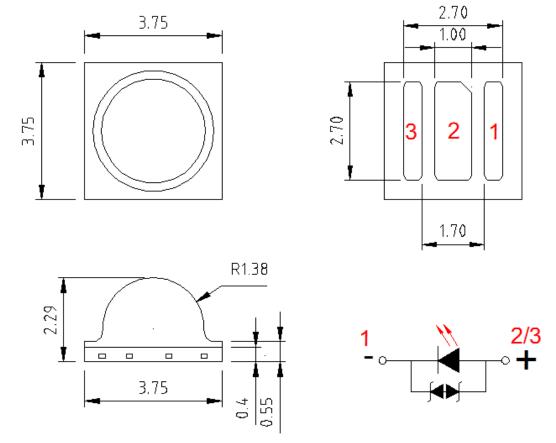

\* The tolerance unless mentioned is ±0.2mm, unit = mm

#### Recommended Solder Pad

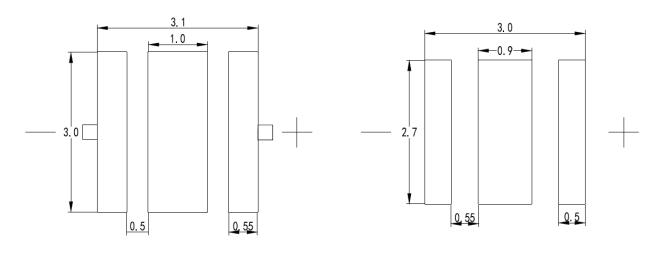

Recommended solder pad


Recommended stencil opening

\* The tolerance unless mentioned is ±0.1mm, unit = mm

Fujian Lightning Optoelectronic Co.,Ltd.	www.tdled.com
Device No.: N/A	Rev.1 7




# **Reflow Soldering Characteristics**

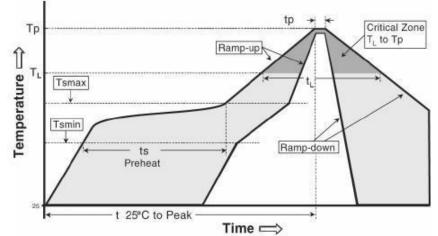

Reflow soldering				
Temperature Min (Tsmin)	150° C			
Temperature Max (Tsmax)	200° C			
Time(ts)from ( Tsmin to Tsmax)	60-120 seconds.			
Ramp-up rate (TL to Tp)	3° C/seconds max.			
Liquidous temperature(TL)	217° C			
Time(tL) maintained above TL	60-150 seconds			
Peak package body temperature( Tp)	260° C max			
Time (tp) within 5° C of the specified classification temperature (Tc).	30 seconds max			
Ramp-down rate (Tp to TL)	6° C/second max			
Time 25 ° C to peak temperature	8 min max			





### Package Dimensions of Tape

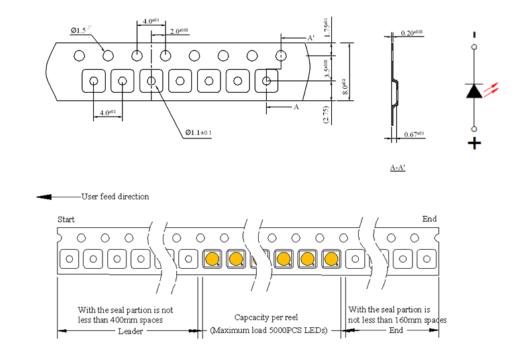

- \* Quantity : Max 1000pcs/Reel
- \* Cumulative Tolerance : Cumulative Tolerance/10 pitches to be ±0.25mm
- \* Package : P/N, Manufacturing data Code No. and Quantity to be indicated on a damp proof Package.
- \* unit = mm

# **Package Dimensions of Reel**

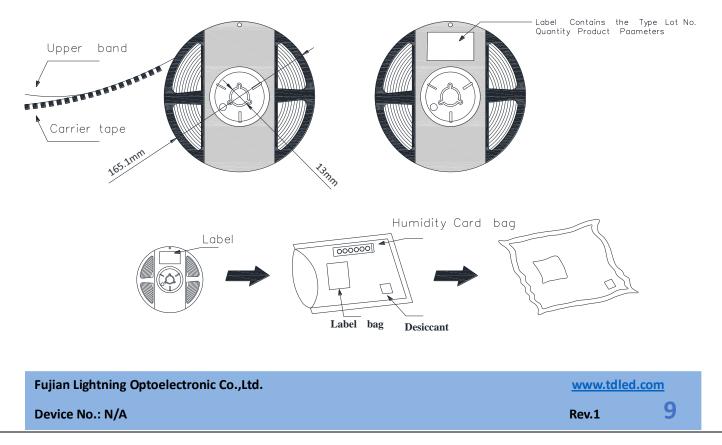

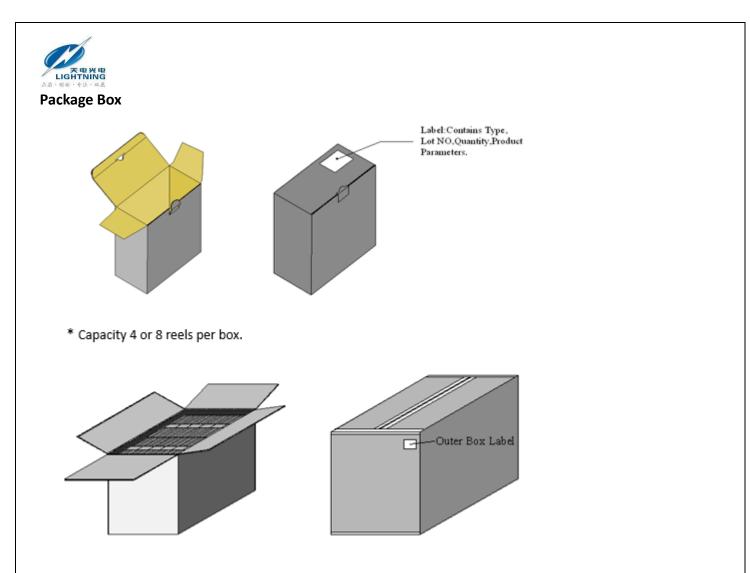

\* Capacity 48 or 64 reels per box.

# Label (标签)



Fujian Lightning Optoelectronic Co.,Ltd.	www.tdled.co	<u>om</u>
Device No.: N/A	Rev.1	10



## Caution

1. Reflow soldering is recommended not to be done more than two times. In the case of more than 24 hours passed soldering after first, LEDs will be damaged.

2. Repairs should not be done after the LEDs have been soldered. When repair is unavoidable, suitable tools must be used.

- 3. Die slug is to be soldered.
- 4. When soldering, do not put stress on the LEDs during heating.
- 5. After soldering, do not warp the circuit board.

#### Notes on Lightning Ceramic Series soldering:

- 1. Recommend to use reflow machine.
- 2. Recommend to use heating plate soldering.
- 3. Manual soldering is not recommended.

#### Notes on reflow process:

1. To confirm whether the actual temperature curve in the reflow soldering conditions comply with recommended conditions. LEDs are guaranteed for one time reflow.

- 2. During reflow process do not apply force on LED active area.
- 3. After reflow process, PCB board should be cooled down before packing or storage.

## Precaution for use

Storage

1.Before opening the package: The LED should be kept at  $30^{\circ}$ C or less and 90%RH or less.

2.After opening the package: The LED's floor life is 168Hrs under 30°C or less and 60%RH or less. If unused LED remain, it should be stored in moisture proof packages JEDEC (MSL 3).

3. If the moisture absorbent material(silica gel)has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions:

Baking treatment: $60\pm5^{\circ}$ C for 24 hours.